

[POWER] [COMMANDER III]

CERTIFIED **USB**

2002-2005 Honda RC51 Installation Instructions

Parts List

- 1 Power Commander
- 1 USB Cable
- 1 CD-ROM
- 1 Installation Guide
- 1 Power Adapter
- 2 Power Commander Decals
- 2 Dynojet Decals
- 2 Velcro® Strip
- 1 Alcohol Swab

Button Adjustment Display



Faceplate Buttons

Expansion Port

USB Port




The ignition MUST be turned OFF before installation!

You can also download the Power Commander software and latest maps from our web site at:

www.powercommander.com


PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION

Fig. A

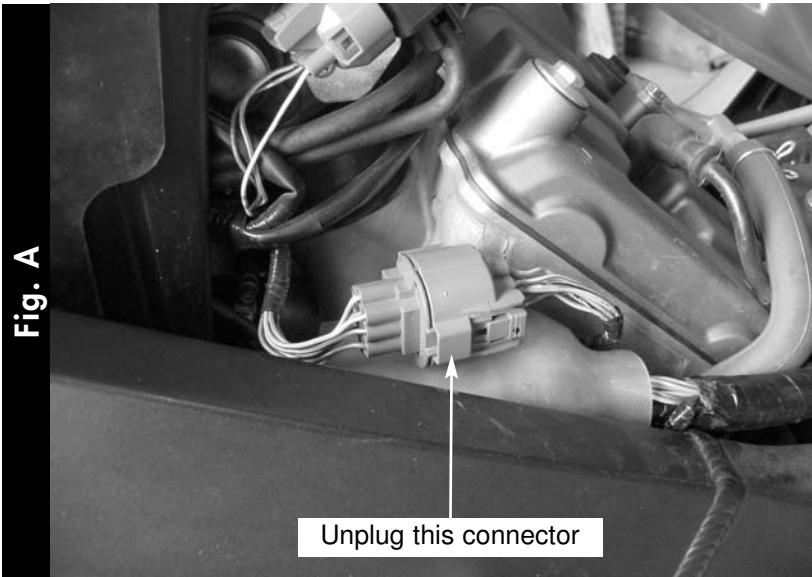


- 1 Remove the main seat and rear solo seat cover.
- 2 Prop the front of the fuel tank up.
- 3 Locate the connector in Fig. A. Unplug this connector. This connector is located on the left hand side of the bike.

Fig. B

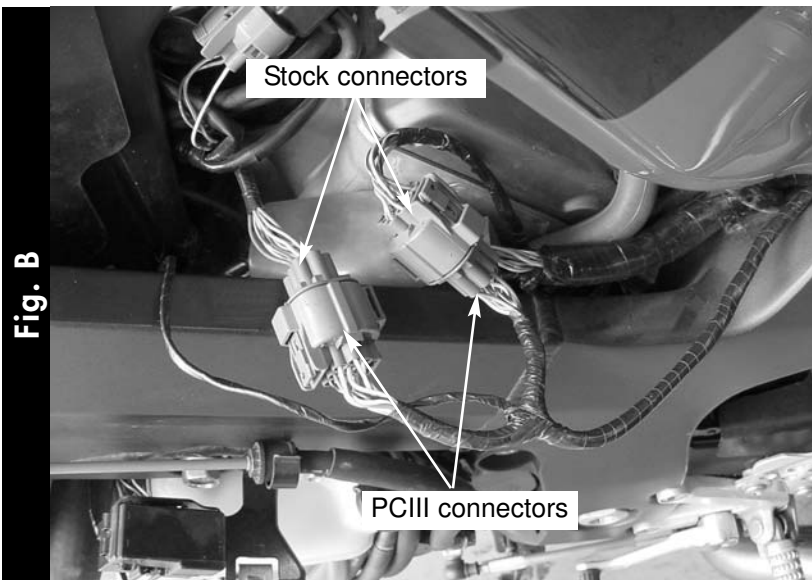

- 4 Plug the grey connectors from the PCIII inline of the stock connectors (Fig. B)

Fig. C

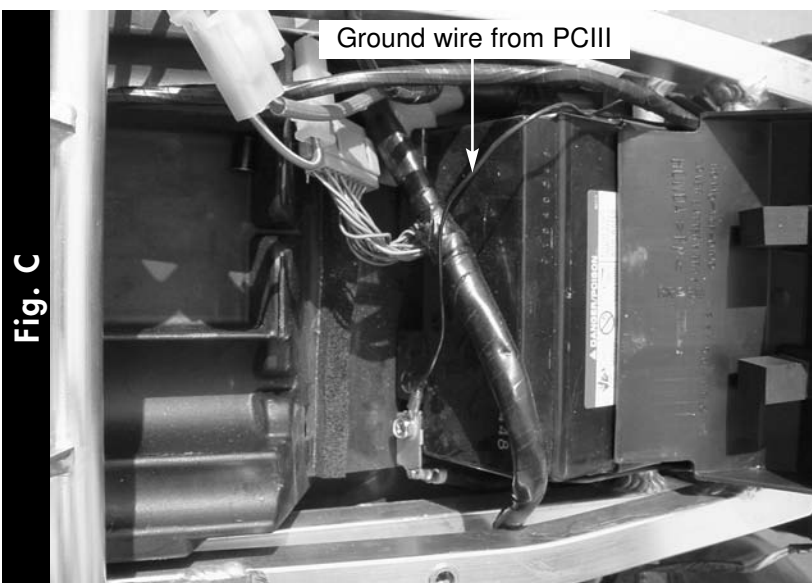

- 5 Attach the ground wire from the PCIII to the negative side of the battery (Fig. C).



- 6 With the supplied self adhesive velcro, attach the PCIII towards the rear most area of the inner fender (Fig. E). Use the supplied alcohol swab to clean both surfaces before attaching.