

# [POWER] [COMMANDER III]

CERTIFIED **USB**

## 2005-2007 Suzuki SV 1000 Installation Instructions

### Parts List

- 1 Power Commander
- 1 USB Cable
- 1 CD-ROM
- 1 Installation Guide
- 1 Power Adapter
- 2 Power Commander Decals
- 2 Dynojet Decals
- 2 Velcro® Strip
- 1 Alcohol Swab

Button Adjustment Display



Faceplate Buttons

Expansion Port

USB Port




**The ignition MUST be turned OFF before installation!**

You can also download the Power Commander software and latest maps from our web site at:

[www.powercommander.com](http://www.powercommander.com)


**PLEASE READ ALL DIRECTIONS BEFORE STARTING INSTALLATION**

Fig. A

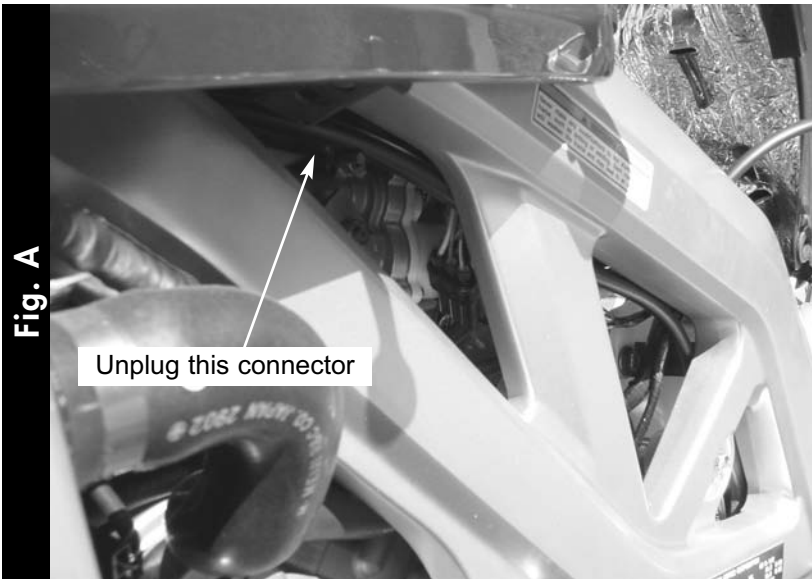


- 1 Remove the main seat and the passenger seat.
- 2 Prop the front of the fuel tank up using the Suzuki prop rod.
- 3 Route the Power Commander harness from the tail section towards the engine.
- 4 Locate the stock, black fuel connector (Fig. A). This connector is located to the left side of the engine, just inside the frame rail.

Fig. B

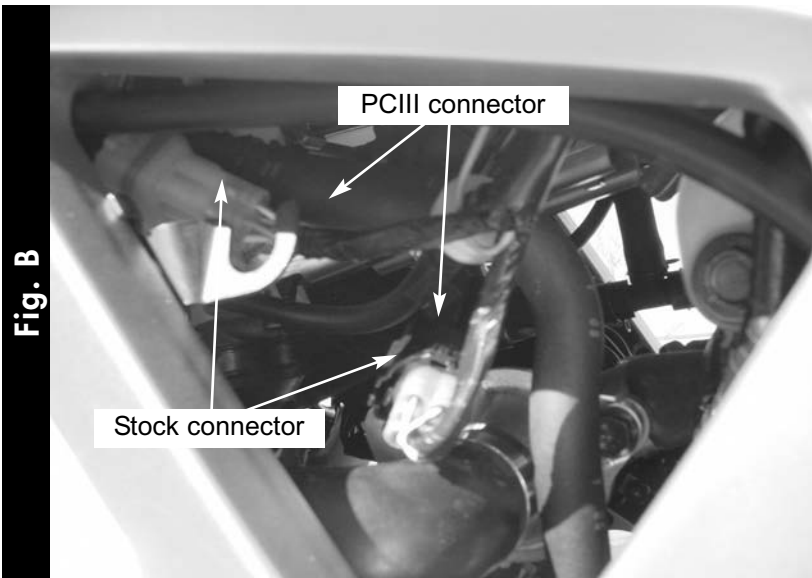


- 5 Unplug this connector and plug the Power Commander connectors in-line (Fig. B).


Fig. C

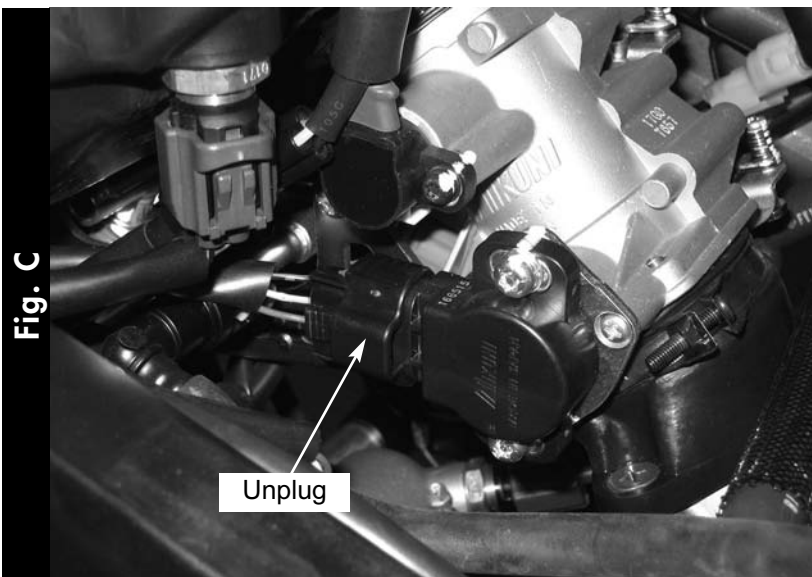

- 6 Locate the Throttle Position Sensor connector, located on the left side of the throttle body.
- 7 Unplug the connector from the TPS.

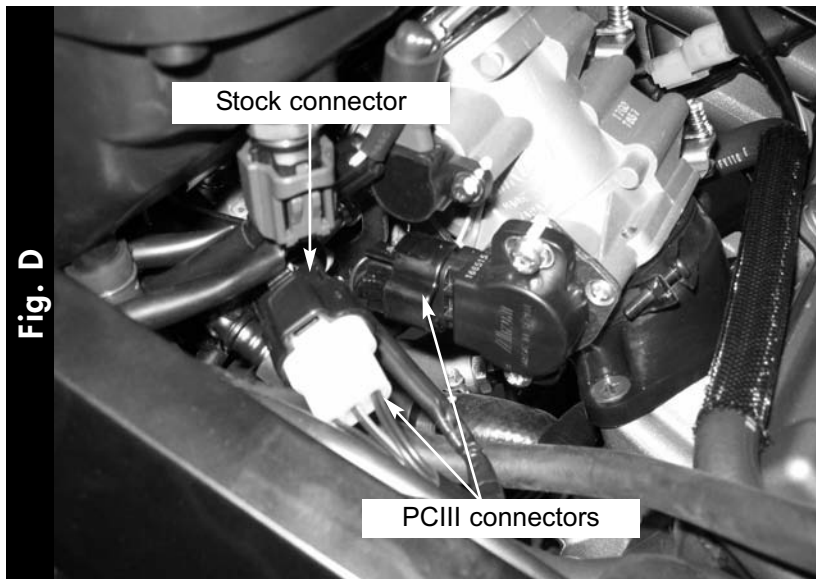

8 Plug the PCIII connectors in-line of the stock wiring harness and TPS (Fig. D).

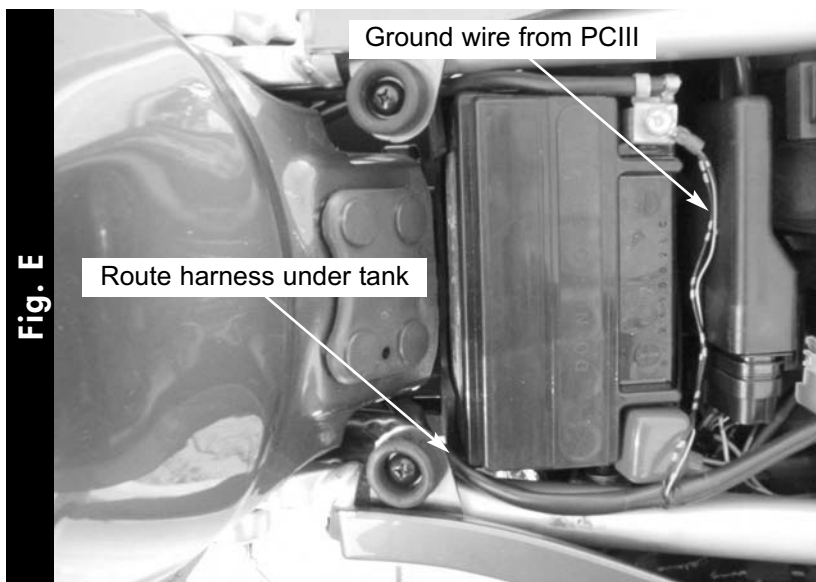

9 Attach the ground wire from the Power Commander to the negative side of the battery (Fig. E).



10 Install the Power Commander in the tail section. Fig. F.

11 Bolt the fuel tank back down. Install the main seat and the passenger seat.